
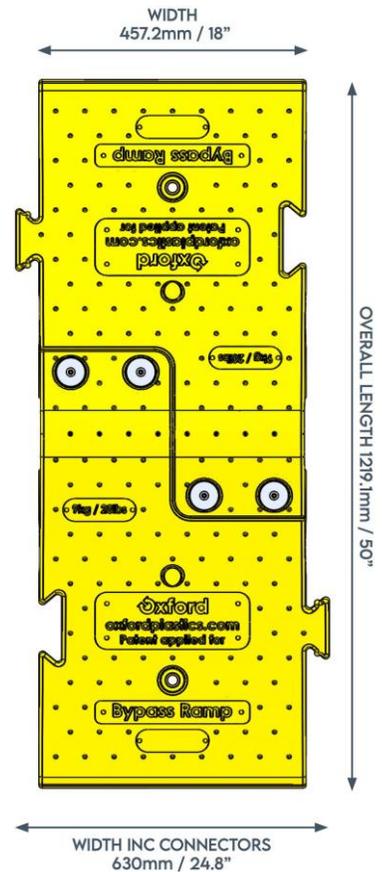


BYPASS RAMP

TEMPORARY COVER FOR PIPES,
CABLES, AND HOSES

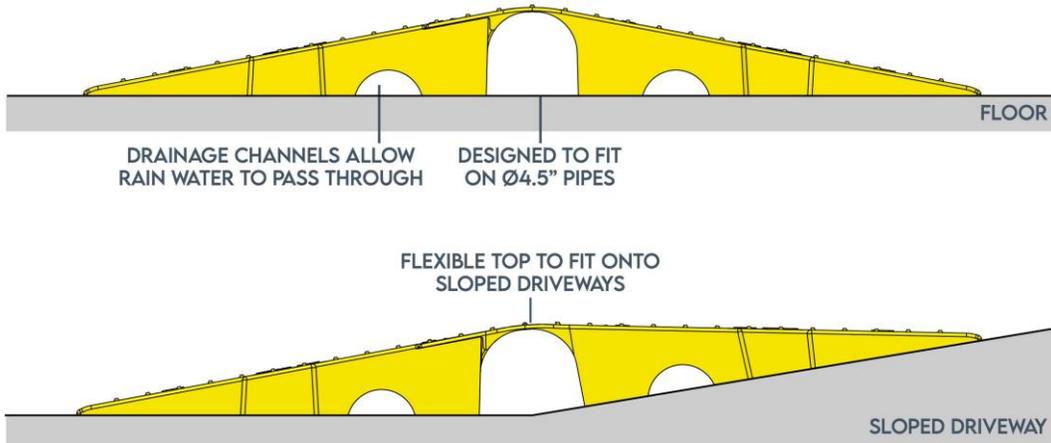

KEY BENEFITS:

- ACCESS over diverted PIPES and HOSES.
- LOAD RATED up to 44 TON vehicles.
- LIGHTWEIGHT for ONE PERSON installment - 21 lbs.
- ACCEPTS up to 4.5" diameter LOAD BEARING pipes.
- ACCEPTS up to 3.5" diameter NON-LOAD BEARING pipes.
- Hard-wearing ANTI-TRIP and SLIP RESISTANT TEXTURE.
- BUILT-IN ground ANCHOR POINTS.
- LONG LASTING and REUSABLE.
- ADAPTABLE to varying SLOPES and WIDTHS.
- MODULAR system for QUICK and CUSTOM install.

IDEAL FOR:

- GENERAL CONTRACTORS
- HYDRO, GAS & SEWER
- OIL, GAS & ENERGY
- DEMOLITIONS
- ROADWORKS
- HIGHWAY MAINTENANCE
- MUNICIPALITIES
- RESTORATION
- EMERGENCY RESPONSE

USED FOR:

- PIPE CROSSING
- UTILITY BYPASS CABLE
- PROTECTION VEHICLE
- CROSSING
- PEDESTRIAN CROSSING

Made In The U.K.




BYPASS RAMP



HEAVY-DUTY



HAND DEPLOYABLE

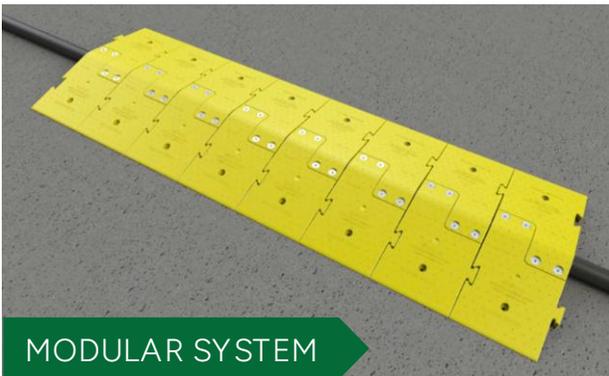

MODULAR SYSTEM

MATERIAL: Low-Density Polyethylene

SIZE: 50" x 18" x 4.8"

AREA: 6.25 sqft.

WEIGHT: 21 lbs. (9 kg.)

Weight Rating: 44 tons/ 97,000 lbs. vehicle

Max. Pipe Size: Ø 4.5" OD that can withstand
6 tons/ 13,200 lbs.

Slip Rating: Low slip potential – Dry (105)
– Wet (39)

Interlocking Edges: Interlocking modular units for
adaptable ramp width and greater
stability.

Anchor Points: Built-in anchor points allow the ramp to
be secured to the ground for stability
under traffic.