


15/10 BOARD

TRENCH COVER SYSTEM

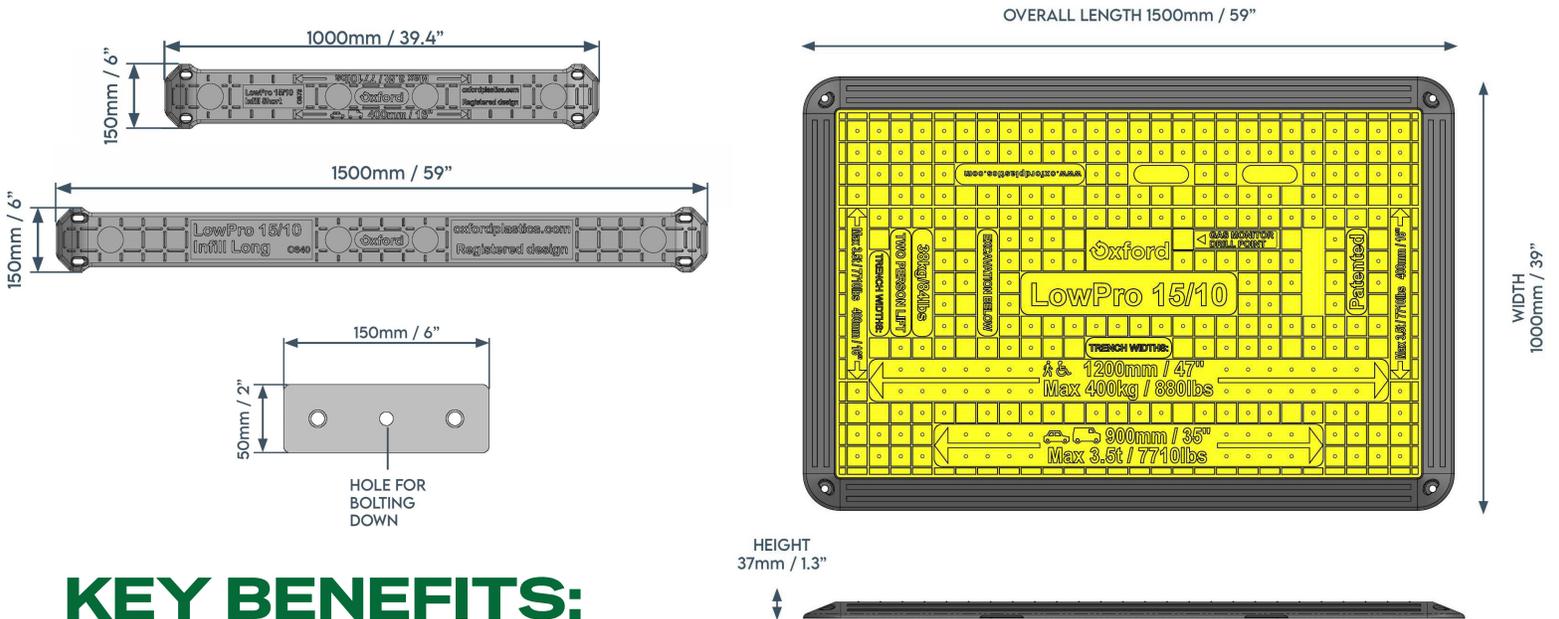

KEY BENEFITS:

- Easy to **INSTALL** with **TWO PEOPLE** at 84 lbs.
- Covers trenches up to **48** inches wide for **PEDESTRIANS**.
- Covers trenches up to **35** inches wide for **VEHICLES**.
- Supports **VEHICLES** up to **7,710 lbs**.
- High **VISIBILITY** and **ANTI-SLIP** protection.
- Maintains safe **ACCESS** over **TRENCHES**.
- **MODULAR SYSTEM** to span long **TRENCHES**.
- **LONG & SHORT** infills connect **MULTIPLE COVERS**.
- **LONG LASTING** and **LOWER TRANSPORT** cost.
- **BUILT-IN** holes for **ANCHORING**
- Includes a **GAS MONITOR** drill point.

IDEAL FOR:

- GENERAL CONTRACTORS
- HYDRO, GAS & SEWER
- OIL, GAS & ENERGY
- DEMOLITIONS
- LANDSCAPING
- MUNICIPALITIES
- RESTORATION
- EMERGENCY RESPONSE

USED FOR:

- TRENCH COVER
- DRIVEWAY ACCESS
- PEDESTRIAN CROSSING
- HOLE COVER
- MODULAR TRENCH SPANS

Made In The U.K.



15/10 BOARD

Signature Series



MATERIAL: GRP Composite
Rebar-Reinforced
PVC Border

SIZE: 59" x 39" x 1"

SURFACE AREA: 16 sqft.

WEIGHT: 84 lbs./ 38 kg.

Max. Vehicle Weight: 7,710 lbs.

Max. Vehicle Span: 35 in./ 900 mm

Max. Pedestrian Span: 48 in./ 1219 mm

Deflection: 875 kg./ 1930 lbs. = 9.0 m/ 0.35"

Ultimate Load Failure: 4,800kg./ 10,582lb

Traction: Low slip potential rating.

Temperature Range: -30 °C to 50°C

Weight Rating: *Not designed for public street traffic or heavy trucks.